

Integrating the Healthcare Enterprise



5

IHE Pharmacy Technical Framework Supplement

10

Pharmacy Pharmaceutical Advice (PADV)

15

Trial Implementation

20

Date: September 27, 2012
Author: Jürgen Brandstätter
Email: pharmacy@ihe.net

25

Foreword

This is a supplement to the forthcoming IHE Pharmacy Technical Framework. Each supplement undergoes a process of public comment and trial implementation before being incorporated into the volumes of the Technical Frameworks.

- 30 This supplement is submitted for Trial Implementation as of September 27, 2012 and will be available for testing at subsequent IHE Connectathons. The supplement may be amended based on the results of testing. Following successful testing it will be incorporated into the forthcoming Pharmacy Technical Framework. Comments are invited and may be submitted on the IHE forums at <http://www.ihe.net/pharmacy/pharmacycomments.cfm> or by email to pharmacy@ihe.net.

- 35 This supplement introduces a new forthcoming technical framework and where indicated amends text by addition (**bold underline**) or removal (**~~bold strikethrough~~**), as well as addition of large new sections introduced by editor's instructions to "add new text" or similar, which for readability are not bolded or underlined. "Boxed" instructions like the sample below indicate to 40 the Volume Editor how to integrate the relevant section(s) into the relevant Technical Framework volume:

Replace Section X.X by the following:

- 45 General information about IHE can be found at: www.ihe.net

Information about the IHE Pharmacy domain can be found at:
<http://www.ihe.net/Domains/index.cfm>

Information about the structure of IHE Technical Frameworks and Supplements can be found at:
<http://www.ihe.net/About/process.cfm> and <http://www.ihe.net/profiles/index.cfm>

- 50 The current version of the IHE Technical Framework can be found at:
http://www.ihe.net/Technical_Framework/index.cfm

CONTENTS

	INTRODUCTION	5
55	OPEN ISSUES AND QUESTIONS	5
	CLOSED ISSUES.....	5
	VOLUME 1 – PROFILES	6
	1.N COPYRIGHT PERMISSION	6
	2.5 DEPENDENCIES OF THE PHARMACY INTEGRATION PROFILES.....	6
60	2.7 HISTORY OF ANNUAL CHANGES	6
	3 PHARMACY PHARMACEUTICAL ADVICE CONTENT PROFILE.....	7
	3.1 PURPOSE AND SCOPE	7
	3.2 PROCESS FLOW	8
	<i>3.2.1 Use Case 1: Validating a prescribed item</i>	8
65	3.3 ACTORS/TRANSACTIONS	8
	3.4 OPTIONS	9
	3.5 GROUPINGS.....	9
	<i>3.5.1 Community Pharmacy Prescription and Dispense</i>	9
	3.6 SECURITY CONSIDERATIONS.....	9
70	3.7 CONTENT MODULES	10
	<i>3.7.1 Structure of a Pharmacy Pharmaceutical Advice Document</i>	11
	GLOSSARY	12
	VOLUME 3 – CONTENT MODULES	13
	5.0 NAMESPACES AND VOCABULARIES.....	14
75	5.1 IHE FORMAT CODES	14
	6.0 PHARMACY CONTENT MODULES.....	15
	6.3 HL7 VERSION 3.0 CONTENT MODULES	15
	<i>6.3.1 CDA Document Content Modules</i>	15
	6.3.1.2 Pharmacy Pharmaceutical Advice Specification 1.3.6.1.4.1.19376.1.9.1.1.2.....	15
80	6.3.1.2.1 Format Code	15
	6.3.1.2.2 Parent Template	15
	6.3.1.2.3 Standards.....	15
	6.3.1.2.4 Data Element Index.....	16
	6.3.1.2.5 Data Element Specification.....	17
	6.3.1.2.6 Conformance	17
85	<i>6.3.2 CDA Header Content Modules</i>	19
	<i>6.3.3 CDA Section Content Modules</i>	19
	6.3.3.2 Pharmaceutical Advice Section Content Module (1.3.6.1.4.1.19376.1.9.1.2.2).....	19
	6.3.3.2.1 Parent Templates.....	19
	6.3.3.2.2 Pharmaceutical Advice ID	20
90	<i>6.3.4 CDA Entry Content Modules</i>	21
	6.3.4.3 Pharmaceutical Advice Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.3).....	21
	6.3.4.3.1 Standards.....	21
	6.3.4.3.2 Parent Template	21
	6.3.4.3.3 Specification	22
	6.3.4.3.3.1 Pharmaceutical Advice Item Entry General Specification.....	23
	6.3.4.3.3.2 Pharmaceutical Advice Item Entry TemplateID	23

	6.3.4.3.3.3 Observation ID (Pharmaceutical Advice Item ID).....	23
100	6.3.4.3.3.4 Observation Code	23
	6.3.4.3.3.5 Narrative comment	25
	6.3.4.3.3.6 Status Code	25
	6.3.4.3.3.7 Pharmaceutical Adviser	25
	6.3.4.3.3.8 Reference to Prescription Item.....	26
105	6.3.4.3.3.9 Reference to Pharmaceutical Advice Concerns	27
	6.3.4.3.3.10 Changed or Recommended Prescription Items (as Organizer).....	27
	6.3.4.4 Pharmaceutical Advice Concern Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.5).....	29
	6.3.4.4.1 Standards.....	29
	6.3.4.4.2 Parent Template	29
110	6.3.4.4.3 Specification	29
	6.3.4.4.3.1 Pharmaceutical Advice Concern Entry General Specification.....	30
	6.3.4.4.3.2 Prescription Item Entry TemplateID	30
	6.3.4.4.3.3 Pharmaceutical Advice Concern ID.....	31
	6.3.4.4.3.4 Pharmaceutical Advice Concern Code.....	31
115	6.3.4.4.3.5 Narrative description of the ICA.....	31
	6.3.4.4.3.6 Pharmaceutical Advice Concern Status Code	31
	6.3.4.4.3.7 Effective Time	31
	6.3.4.4.3.8 Problems caused by the referenced prescription or Dispense Item	31
	6.3.4.4.3.9 Referenced prescription or Dispense Item	32
	6.3.4.4.3.10 Severity of the concern	33
120	6.5 PHARM VALUE SETS	34
	6.5.1 <i>IHE Pharmaceutical Advice Status List</i>	34
	APPENDIX	34

125

Introduction

130 The Pharmacy Pharmaceutical Advice Document Profile (PADV)¹ describes the content and format of a pharmaceutical advice document generated during the process in which a health care professional (in most cases, but not necessarily always, a pharmacist) validates a Prescription Item of a prescription against pharmaceutical knowledge and regulations. The validation can be with regard to conflicts with other Prescription Items or current medication of the patient or other reasons which affect the further processing of the Prescription Item (may be dispensed, dispensed with change, etc.).

135 Documents created according to this profile are intended to be used in the context of the “Community Prescription and Dispense” Integration Profile (CMPD). This supplement also references other documents². The reader should have already read and understood these documents:

1. [PHARM Common parts document](#)
2. [PHARM Community Prescription and Dispense Integration Profile \(CMPD\)](#)
3. [PCC Technical Framework Volume 1](#)
4. [PCC Technical Framework Volume 2](#)
5. [IT Infrastructure Technical Framework Volume 1](#)
6. [IT Infrastructure Technical Framework Volume 2](#)
7. [IT Infrastructure Technical Framework Volume 3](#)
- 145 8. HL7 and other standards documents referenced in this document

Open Issues and Questions

- Shall the pharmaceutical advice document also be applicable to be related to Dispense Items (instead of Prescription Items) for e.g., cancelling already dispensed items.

Closed Issues

150

¹ From the clinical work practice perspective, a prescription is reviewed by a clinical pharmacist. The review may or may not result in recommendation(s) or advice(s) to the prescribing clinician to modify the prescription. Hence semantically more accurate this profile could be referenced as Pharmacist Pharmaceutical Review Document Profile. However, given the pervasive use of this profile, it is agreed through the international review that this profile name remains unchanged.

² The first seven documents can be located on the IHE Website at http://www.ihe.net/Technical_Framework/index.cfm. The remaining documents can be obtained from their respective publishers.

Volume 1 – Profiles

Add the following to section 1.n

1.n Copyright Permission

155 Health Level Seven, Inc., has granted permission to the IHE to reproduce tables from the HL7 standard. The HL7 tables in this document are copyrighted by Health Level Seven, Inc. All rights reserved. Material drawn from these documents is credited where used.

Add the following to section 2.5

2.5 Dependencies of the Pharmacy Integration Profiles

Pharmacy Pharmaceutical Advice (PADV)	PCC	Content definition	This profile includes Section and Entry Content Modules of the Patient Care Coordination (PCC) domain.
---------------------------------------	-----	--------------------	--

160

Add the following to section 2.7

2.7 History of Annual Changes

Add Section X

3 Pharmacy Pharmaceutical Advice Content Profile

- 165 The Pharmacy Pharmaceutical Advice Document Profile (PADV) describes the content and format of a pharmaceutical advice generated during the process in which a health care professional (in most cases, but not necessarily always, a pharmacist) validates a Prescription Item of a prescription against pharmaceutical knowledge and regulations. The validation can be with regard to conflicts with other Prescription Items or current medication of the patient or other reasons which affect the further processing of the Prescription Item (may be dispensed, dispensed with change, etc.).
- 170 Documents created according to this profile are intended to be used in the context of the “Community Prescription and Dispense” Integration Profile (CMPD).

3.1 Purpose and Scope

- 175 The Community Pharmacy Prescription and Dispense workflow includes the stage of validation of a prescription by a health care professional, usually different from the prescriber, possibly also supported by expert systems.
- A pharmaceutical advice document is the outcome of the validation of one Prescription Item. It contains the details, Intolerances, Contra-indications and Allergies (ICAs) and all other information which was discovered during validation and the overall result of it which affects the further processing.
- 180 This profile defines the content and format of such a pharmaceutical advice document.
- For a detailed overview on the whole Pharmacy domain business processes, please refer to the “Common parts” document, which is accompanying this profile.

185

3.2 Process Flow

3.2.1 Use Case 1: Validating a prescribed item


190 A patient enters the community pharmacy and requests a Prescription Item to be dispensed. The requested Prescription Item has not yet been validated by the Pharmaceutical Adviser.

Usually the pharmacist uses the pharmacy information system for validating the Prescription Item. After the process the result of the validation is stated in a Pharmaceutical Advice document. If the result was successful, the prescription is allowed to be dispensed by a Medication Dispenser.

195 Refer to the Community Pharmacy Prescription and Dispense Integration Profile (CMPD) for detailed use case information.

3.3 Actors/Transactions

200 There are two actors in this profile, the Content Creator and the Content Consumer. Content is created by a Content Creator and is to be consumed by a Content Consumer. The sharing or transmission of content from one actor to the other is addressed by the appropriate use of IHE profiles described below, and is out of scope of this profile. A Document Source or a Portable Media Creator may embody the Content Creator Actor. A Document Consumer, a Document Recipient or a Portable Media Importer may embody the Content Consumer Actor. The sharing or transmission of content or updates from one actor to the other is addressed by the use of appropriate IHE profiles described in the section on Content Bindings with XDS, XDM and XDR in PCC TF_2:4.1

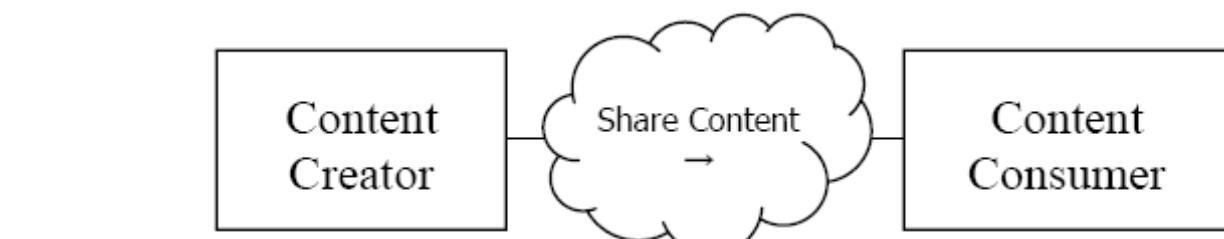

210

Figure 3.3-1: Actor Diagram

215 **3.4 Options**

Options that may be selected for this Content Profile are listed in table 3.4-1 along with the Actors to which they apply. Dependencies between options when applicable are specified in notes.

220 **Table 3.4-1: Pharmacy Pharmaceutical Advice Actors and Options**

Actor	Option	Section
Content Consumer	View Option (See Note 1) Document Import Option (See Note 1) Section Import Option (See Note 1) Discrete Data Import Option (See Note 1)	PCC TF-2: 3.1.1 PCC TF-2: 3.1.2 PCC TF-2: 3.1.3 PCC TF-2: 3.1.4
Content Creator	No options defined	

Note 1: The Actor shall support at least one of these options.

225 **3.5 Groupings**

Content profiles may impose additional requirements on the transactions used when grouped with actors from other IHE Profiles.

3.5.1 Community Pharmacy Prescription and Dispense

230 Actors from the Pharmacy CMPD profile embody the Content Creator and Content Consumer sharing function of this profile. A Content Creator or Content Consumer may be grouped with appropriate actors from the XDS, XDM or XDR profiles to exchange the content described therein. The metadata sent in the document sharing or interchange messages has specific relationships or dependencies (which we call bindings) to the content of the clinical document described in the content profile.

The Patient Care Coordination Technical Framework defines the bindings to use when grouping the Content Creator of this Profile with actors from the Pharmacy CMPD Integration Profiles.

235 **3.6 Security Considerations**

The PADV Integration Profile assumes that a minimum security and privacy environment has been established across all participants. Security policies must exist regarding the use of training, agreements, risk management, business continuity and network security that need to be already in place prior to the implementation of PADV.

240 The IHE ITI ATNA Integration Profile is required of the actors involved in the IHE transactions specified in this profile to protect node-to-node communication and to produce an audit trail of the PHI related actions when they exchange messages.

In addition, the IHE ITI DSG Integration Profiles can be applied to the actors involved in the transactions specified in this profile to securely identify individuals involved in transactions and verify document integrity and authorizations (DSG).

245 Interested parties should also read the detailed Security Considerations sections provided for each of the aforementioned profiles in the IHE ITI Technical Framework and its supplements.

The PADV profile does have a few security considerations of its own.

250 Pharmacy systems should be thoughtfully designed so that providers are able to review and verify information before it is imported into their Pharmacy system, and that positive user acknowledgements are made before import, and audit trails are recorded when imports occur.

Imported information should be traceable both to the source Pharmacy system, and the receiver that accepted it into the Pharmacy system. XDS Affinity domain policies should support policies and procedures for tracing information flows between Pharmacy systems.

255 Because the information being transferred is in XML, it will be common that different Pharmacy systems utilize different transformations to render the contents into human readable form. A Content Creator should make available the transforms used by the sending provider to review the documents, and a Content Consumer must support rendering the information as seen by the sending provider, allowing both providers to see what was sent in its original rendered form.


260 **3.7 Content Modules**

Content modules describe the content of a payload found in an IHE transaction. Content profiles are transaction neutral. They do not have dependencies upon the transaction that they appear in. These dependencies are reflected in the Bindings listed above.

265 All Pharmacy Pharmaceutical Advices shall be structured and coded as required by the Pharmacy Pharmaceutical Advice Document Content Module described in this profile. The inclusion of the specific coded attributes explicitly defined as optional, may be supported by specific implementations of Document Sources using an IHE identified coded terminology of their choice. The requirements and manner in which implementations support such capabilities is beyond the scope of this Integration Profile.

270

3.7.1 Structure of a Pharmacy Pharmaceutical Advice Document

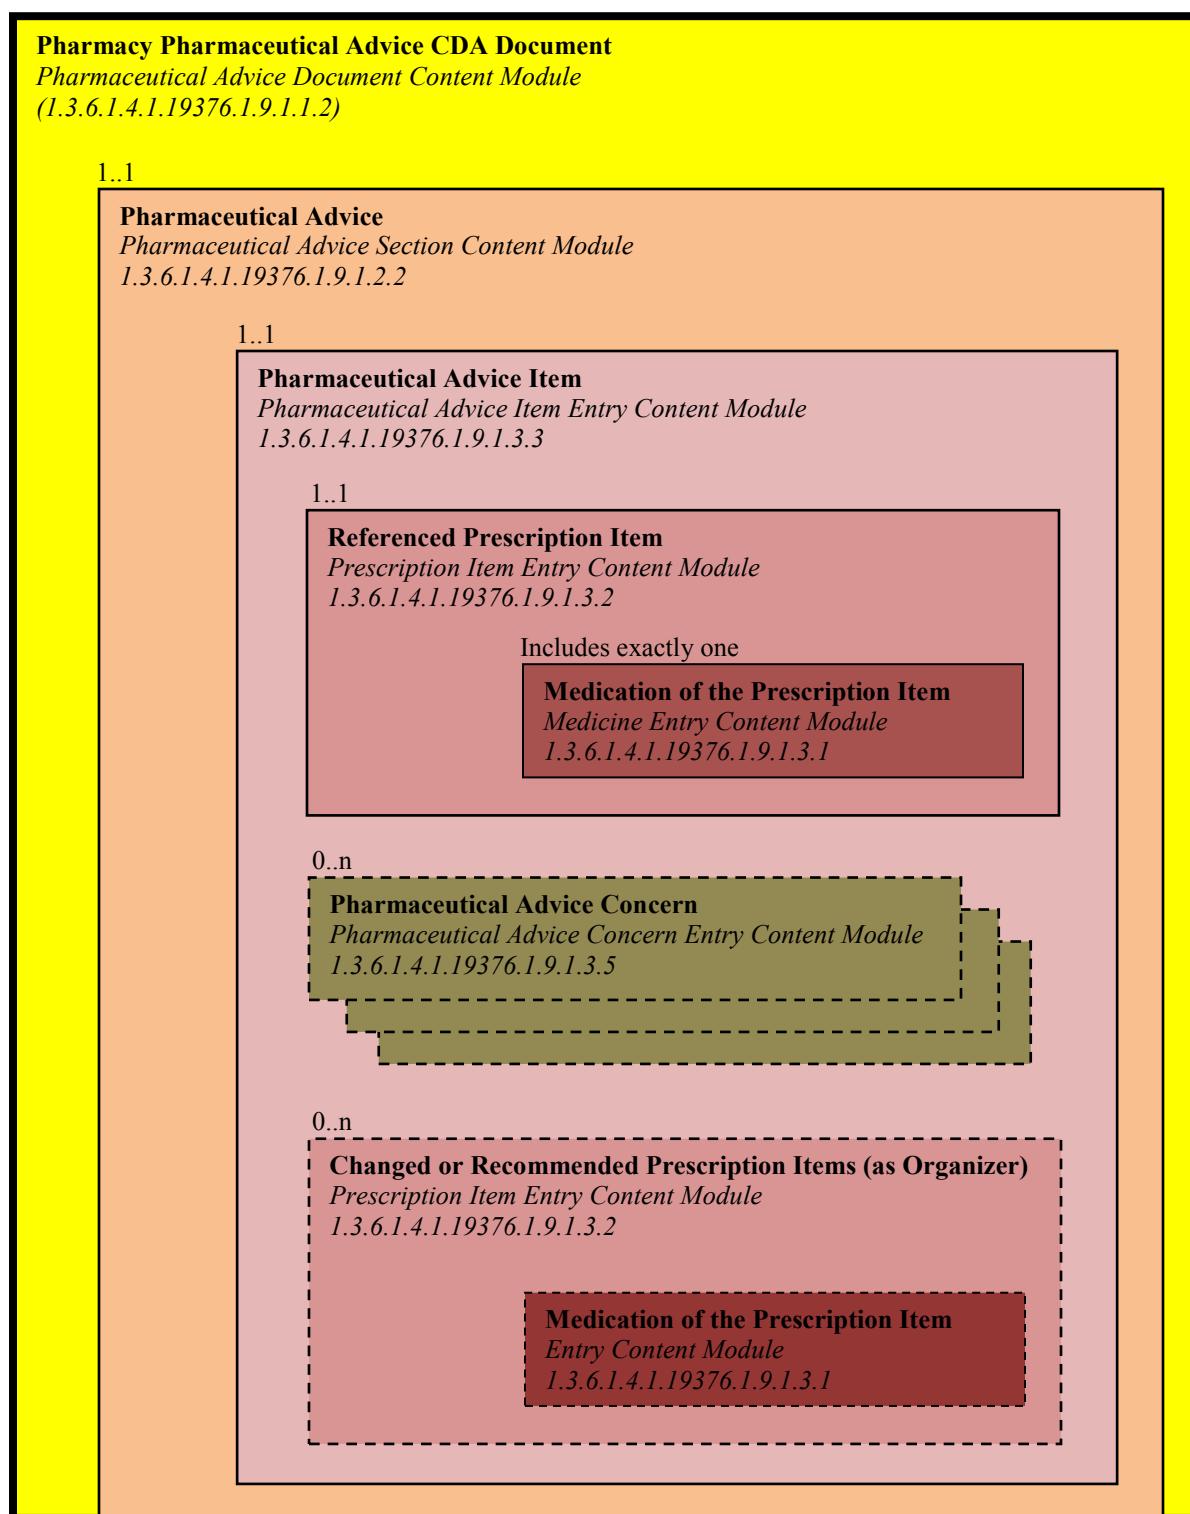

Glossary

The glossary of the Pharmacy Prescription is applicable to this supplement and described in the “Pharmacy Prescription (PRE)” supplement.

275

Volume 3 – Content Modules

5.0 Namespaces and Vocabularies

280

codeSystem	codeSystemName	Description
1.3.6.1.4.1.19376.1.9	IHE Pharmacy Object Identifiers	This is the root OID for all IHE Pharmacy objects
1.3.6.1.4.1.19376.1.5.3.4		Namespace OID used for IHE Extensions to CDA Release 2.0

See also the Namespaces and Vocabularies of the IHE PCC Technical Framework [PCC-TF2/Namespaces and Vocabularies](#).

285

5.1 IHE Format Codes

Profile	Format Code	Media Type	Template ID
2010 Profiles			
Pharmacy Pharmaceutical Advice (PADV)	urn:ihe:pharm:padv:2010	text/xml	1.3.6.1.4.1.19376.1.9.1.1.2

6.0 Pharmacy Content Modules

6.3 HL7 Version 3.0 Content Modules

290 **6.3.1 CDA Document Content Modules**

<i>Add section 6.3.1.2</i>

6.3.1.2 Pharmacy Pharmaceutical Advice Specification 1.3.6.1.4.1.19376.1.9.1.1.2

295 This section defines the base set of constraints used by almost all medical document profiles described the PCC Technical Framework.

Structure	Pharmacy Pharmaceutical Advice
Format Code	urn:ihe:pharm:padv:2010
LOINC Code	61356-2 (Medication Pharmaceutical Advice)
Document Template ID	1.3.6.1.4.1.19376.1.9.1.1.2
Section name / template ID	Pharmaceutical Advice 1.3.6.1.4.1.19376.1.9.1.2.2
Entry name / template ID	Pharmaceutical Advice Item 1.3.6.1.4.1.19376.1.9.1.3.3
template ID	Pharmaceutical Advice Concern 1.3.6.1.4.1.19376.1.9.1.3.5

6.3.1.2.1 Format Code

The XDSDocumentEntry format code for this content is **urn:ihe:pharm:padv:2010**.

300 **6.3.1.2.2 Parent Template**

This document is an instance of the [Medical Document](#) template.

6.3.1.2.3 Standards

HL7V3 NE2009	HL7 V3 2009 Normative Edition
CDAR2	HL7 CDA Release 2.0
CCD	ASTM/HL7 Continuity of Care Document
XMLXSL	Associating Style Sheets with XML documents

6.3.1.2.4 Data Element Index

Data Elements	CDA Release 2.0
Patient Information	recordTarget/patientRole
Patient Administrative Identifiers	recordTarget/patientRole/id
Patient Name	recordTarget/patientRole/patient/name
Patient Gender	recordTarget/patientRole/patient/administrativeGenderCode
Patient Birth Date	recordTarget/patientRole/patient/birthTime
Patient Address	recordTarget/patientRole/addr
Patient Telecom	recordTarget/patientRole/telecom
HCP Person Information	author
HCP ID(s)	author/assignedAuthor/id
HCP Profession	author/functionCode
HCP Name	author/assignedAuthor/assignedPerson/name
HCP Address	author/assignedAuthor/addr
HCP Telecom	author/assignedAuthor/telecom
HCP Specialty	author/assignedAuthor/code
HCP Represented Organization	author/assignedAuthor/representedOrganization
HCP Organization Name	author/assignedAuthor/representedOrganization/name
HCP Organization Address	author/assignedAuthor/representedOrganization/addr
HCP Organization Telecom	author/assignedAuthor/representedOrganization/telecom
Service Event³	documentationOf/serviceEvent
Date of Service Event	documentationOf/serviceEvent/effectiveTime
Service Event Code	documentationOf/serviceEvent/code
Encounter in the healthcare institution⁴	componentOf/encompassingEncounter
ID of the encounter	componentOf/encompassingEncounter/id
Date of Admission/Encounter start date	componentOf/encompassingEncounter/effectiveTime/low
Date of Discharge/Encounter end date	componentOf/encompassingEncounter/effectiveTime/high
Authorization	authorization/consent
Pharmaceutical Advice	HISTORY OF MEDICATION USE

³ Service Event shall not be present in a Pharmaceutical Advice.

⁴ Encounter is optional and shall contain encounter information if applicable.

6.3.1.2.5 Data Element Specification

Data Element Name	Opt	Template ID
<u>Patient Information</u> Name Personal Identification Gender Date of Birth	R	1.3.6.1.4.1.19376.1.5.3.1.1.1
<u>HCP Person Information</u> Name Address HCP Identification Profession		
<u>HCP Organization Information</u> Name Address Organization Identifier Contact Information		
<u>Patient Information</u> Address Contact Information	R2	1.3.6.1.4.1.19376.1.5.3.1.1.1
<u>Patient Information</u> Marital Status Race Ethnicity Religious Affiliation	O	1.3.6.1.4.1.19376.1.5.3.1.1.1
<u>HCP Person Information</u> Contact Information Specialty		
<u>Authorization</u>	R2	1.3.6.1.4.1.19376.1.5.3.1.2.5
<u>Pharmaceutical Advice</u>	R	1.3.6.1.4.1.19376.1.9.1.2.2

310

6.3.1.2.6 Conformance

CDA Release 2.0 documents that conform to the requirements of this content module shall indicate their conformance by the inclusion of the appropriate <templateId> elements in the

315 header of the document. This is shown in the sample document below. A CDA Document may conform to more than one template. This content module inherits from the Medical Summary content module, and so must conform to the requirements of that template as well, thus all <templateId> elements shown in the example below shall be included.

```
<ClinicalDocument xmlns='urn:hl7-org:v3'>
  <typeId extension="POCD_HD000040" root="2.16.840.1.113883.1.3"/>
  <templateId root='1.3.6.1.4.1.19376.1.5.3.1.1.1' />
  <templateId root='1.3.6.1.4.1.19376.1.9.1.1.2' />
  <id root=' ' extension=' ' />
  <code code='61356-2' displayName='Medication Pharmaceutical Advice' 320
        codeSystem='2.16.840.1.113883.6.1' codeSystemName='LOINC' />
  <title>Pharmacy Pharmaceutical Advice</title>
  <effectiveTime value='20100719012005' />
  <confidentialityCode code='N' displayName='Normal' 325
        codeSystem='2.16.840.1.113883.5.25' codeSystemName='Confidentiality' />
  <languageCode code='en-US' />
  <component>
    <structuredBody>
      <!-- 330
      :
      </structuredBody>
    </component>
  </ClinicalDocument>
```

340 **6.3.2 CDA Header Content Modules****6.3.3 CDA Section Content Modules***Add section 6.3.3.C***6.3.3.2 Pharmaceutical Advice Section Content Module (1.3.6.1.4.1.19376.1.9.1.2.2)**

Template ID	1.3.6.1.4.1.19376.1.9.1.2.2	
Parent Template	None	
General Description	The pharmaceutical advice section shall contain a pharmaceutical advice to a medication prescribed for the patient. It shall include exactly one pharmaceutical advice entry as described in the Pharmaceutical Advice Item Entry Content Module.	
LOINC Code	Opt	Description
61357-0	R	MEDICATION PHARMACEUTICAL ADVICE.BRIEF
Entries	Opt	Description
1.3.6.1.4.1.19376.1.9.1.3.3	R	Pharmaceutical Advice Item Entry Content Module

345

```

<component>
  <section>
    <templateId root='1.3.6.1.4.1.19376.1.9.1.2.2' />
    <!-- The section ID is the Pharmaceutical Advice ID -->
    <id root=' ' extension=' '/>
    <code code='61357-0' displayName='MEDICATION PHARMACEUTICAL ADVICE.BRIEF'
      codeSystem='2.16.840.1.113883.6.1' codeSystemName='LOINC' />
    <title>Pharmaceutical Advice</title>
    <text>
      Text as described above
    </text>
    <!-- Pharmaceutical Advice -->
    <entry>
      :
      <!-- Required element indicating the Pharmaceutical Advice entry content module -->
      <observation>
        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.3' />
        :
      </observation>
    </entry>
  </section>
</component>

```

350

355

360

365

6.3.3.2.1 Parent Templates

370 This section content module has no parent structure.

6.3.3.2.2 Pharmaceutical Advice ID

<id root=' ' extension=' '/>

A Pharmaceutical Advice identifier SHALL be represented in the section <id> Element. The data type of the ID is II. Although HL7 allows for multiple identifiers, one and only one shall be used.

375

If this section is used in a Pharmaceutical Advice document, this identifier shall be set equal to the document ID (ClinicalDocument/id).

380

6.3.4 CDA Entry Content Modules

Add section 6.3.4.D

385

6.3.4.3 Pharmaceutical Advice Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.3)

6.3.4.3.1 Standards

This part describes the general structure for a Pharmaceutical Advice Item. It is based on the
390 following standards:

HL7V3 NE2009	HL7 V3 2009 Normative Edition
CCD	ASTM/HL7 Continuity of Care Document
IHE PCC	Medications Entry (1.3.6.1.4.1.19376.1.5.3.1.4.7)

6.3.4.3.2 Parent Template

This entry content module has no parent structure.

395

6.3.4.3.3 Specification

```

<observation classCode='OBS' moodCode='EVN'>
    <templateId root='1.3.6.1.4.1.19376.1.9.1.3.3' />
    <id root='' extension='' />
    <!-- overall status of the validation -->
    <code code=' ' displayName=' ' codeSystem=' ' codeSystemName=' ' />
    <!-- Narrative comment to the result of the validation -->
    <text><reference value="#comment1"/></text>
    <statusCode code='active | completed' />
    <performer typeCode='PRF'>
        <time value='' />
        <assignedEntity>
            <id root='' extension='' />
            <addr></addr>
            <telecom use='' value='' />
            <assignedPerson><name></name></assignedPerson>
            <representedOrganization><name></name></representedOrganization>
        </assignedEntity>
    </performer>
    <!--
        referenced Prescription Item for which this dispense was performed
    -->
    <entryRelationship typeCode='REFR'>
        <substanceAdministration classCode="SBADM" moodCode="INT">
            <templateId root='2.16.840.1.113883.10.20.1.24' />
            <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' />
            <templateId root='1.3.6.1.4.1.19376.1.9.1.3.2' />
            ...
        </substanceAdministration>
    </entryRelationship>
    <!--
        Optional one or more Pharmaceutical Advice Concern entries, representing ICAs
        to other prescription or Dispense Items in case of validation issues with the
        objective Prescription Item
    -->
    <entryRelationship typeCode='REFR' inversionInd='false'>
        :
        .
    </entryRelationship>
    <!--
        Changed or Recommended Prescription Item Organizer
        Shall only be present if the status of the Pharmaceutical Advice is set to
        "OK" or "CHANGE".
    -->
    If the status is set to OK, these Organizers shall be considered as "recommendations"
    If the status is set to CHANGE, these Organizers shall be considered as "changes"

    If more than one Changed or Recommended Prescription Item Organizers are given
    they indicate a "choice" of change or recommendation.
    -->
    <entryRelationship typeCode='REFR' inversionInd='false'>
        <organizer classCode='CLUSTER' moodCode='EVN'>
            <statusCode code='completed' />
            <component>
                <separatableInd value='false'>
                    <substanceAdministration classCode="SBADM" moodCode="INT">
                        <templateId root='2.16.840.1.113883.10.20.1.24' />
                        <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' />
                        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.2' />
                        ...
                    </substanceAdministration>
                </component>
                <component>
                    :
                </component>
            </organizer>
        </entryRelationship>
    
```

460

```
</component>
:
</organizer>
</entryRelationship>
</observation>
```

465

6.3.4.3.3.1 Pharmaceutical Advice Item Entry General Specification

```
<observation classCode='OBS' moodCode='EVN'>
...
</observation>
```

470 The <observation> element SHALL be present and represents the actual pharmaceutical advice. The moodCode attribute shall be EVN to reflect that the pharmaceutical advice has already taken place.

The organizer contains the overall status code of the pharmaceutical advice, the reason for decision as well as every conflicting prescription or Dispense Item.

475 **6.3.4.3.3.2 Pharmaceutical Advice Item Entry TemplateID**

```
<templateId root='1.3.6.1.4.1.19376.1.9.1.3.3'>                   <!-- PHARM -->
```

6.3.4.3.3.3 Observation ID (Pharmaceutical Advice Item ID)

```
<id root=' ' extension=' '/>
```

This ID represents the Pharmaceutical Advice Item ID and SHALL be present.

480 **6.3.4.3.3.4 Observation Code**

```
<code code=' ' displayName=' ' codeSystem=' ' codeSystemName=' '/>
```

The supply entry SHALL indicate the coded result of the validation out of the following list:

codeSystem: **1.3.6.1.4.1.19376.1.9.2.1**

485 codeSystemName: **IHE Pharmaceutical Advice Status List**

Code	displayName
OK	Dispense, no change expected but allowed if recommended medication given
CHANGE	Dispense with change expected
REFUSE	Refusal to dispense until further discussion with prescriber
CANCEL	Definite cancellation of the Prescription Item

Detailed description of statuses

490 The following detailed description explains the meaning of the status codes.

OK

495 The status code OK shall be used, if the referred Prescription Item is allowed to be dispensed without any change. If additional information concerning alternative “recommended” medication is included in the document, according to the chapter 6.3.4.3.3.10 Changed or Recommended Prescription Items (as Organizer). The Medication Dispenser is allowed to either dispense the original prescribed item or the recommended item (or set of item).

500 Example: The Pharmaceutical Adviser may approve Paracetamol as the prescribed item, but adds two alternatives, as first a genericum of Paracetamol and as second a combination of two other medications. In this case the Medication Dispenser may either dispense the original medication, the genericum or the alternative combination of two medications other.

CHANGE

505 The status code CHANGE shall be used, if the referred Prescription Item is allowed to be dispensed with required changes stated according to the chapter 6.3.4.3.3.10 Changed or Recommended Prescription Items (as Organizer). The changes may concern all levels of information of the Prescription Item (the medication itself, intake pattern, patient instructions, etc.).

510 Example 1: The Pharmaceutical Adviser may disapprove Paracetamol as the prescribed item and requests a change to one of two alternatives, as first a genericum of Paracetamol and as second a combination of two other medications. In this case the Medication Dispenser may either dispense the genericum or the alternative combination of two medications other but not the original medication.

515 Example 2: The Pharmaceutical Adviser may disapprove just the prescribed dosage of Paracetamol and describes another dosage. In this case the Medication Dispenser may dispense original prescribed Paracetamol, but has to command the other dosage to the patient.

REFUSE

520 The status code REFUSE shall be used, if the referred Prescription Item is not allowed to be dispensed by a Medication Dispenser and no allowed alternatives are available. The reasons leading to this statement are documented in the Pharmaceutical Advice. Subsequently the prescription has to be further discussed with the prescriber.

525 Example: The Pharmaceutical Adviser disapproves Paracetamol as prescribed item because there exists a contra-indication with another medication of the patient. Since no alternative can be found the therapy has to be modified by the prescriber.

CANCEL

530 The status code CANCEL shall be used to cancel a prescribed or already dispensed medication. In difference to status code “refuse” this means a total abandonment of the Prescription Item (prescribed or dispensed) without expecting it to be refined by the prescriber.

535 Example: A physician wants to replace a recently prescribed (and maybe already dispensed) medication of the patient by a new one. To keep the “current medication”-information of the patient up-to-date the physician first acts as a Pharmaceutical Adviser and cancels the current prescribed (and maybe already dispensed) Prescription Item. Then the physician tells the patient to abandon the recent medication and prescribes a new one.

6.3.4.3.3.5 Narrative comment

<text><reference value="#comment1'/'></text>

540 An optional narrative comment to the result of the validation MAY be referenced in the <text> element.

6.3.4.3.3.6 Status Code

<statusCode code='active | completed'/'>

545 The status code of a Pharmaceutical Advice SHALL be set to either “active” or “completed”, indicating whether the Pharmaceutical Advice is just a pre-release of the validation (active) or the final validation result (completed).

code	Meaning
active	This Pharmaceutical Advice is a provisional result. It is considered as a pre-release advice (e.g., assembled by an automated ICA check function), intended to be a foundation for the final decision taken by another Pharmaceutical Adviser. The results stated in this Pharmaceutical Advice do <u>NOT</u> affect the further workflow.
completed	This Pharmaceutical Advice is a final result. The results stated in this Pharmaceutical Advice will possibly affect the further workflow.

6.3.4.3.3.7 Pharmaceutical Adviser

<performer typeCode='PRF'> ... </performer>

550 In the case where the Pharmaceutical Adviser of a Prescription Item is different from the author of the pharmaceutical advice document, the Pharmaceutical Adviser MAY be represented by the <performer> element of the entry and the author SHALL be represented in the author Element of the document.

Data element	HL7 V3 Data Type	CDA Header position (relative XPath expression)
Timestamp of the pharmaceutical advice	TS	<i>performer/time</i>
Pharmaceutical Adviser Name	PN	<i>performer/assignedEntity/assignedPerson/name</i>
Pharmaceutical Adviser Identifier	II	<i>performer/assignedEntity/id</i>
Pharmaceutical Adviser Organization Identifier	II	<i>performer/assignedEntity/representedOrganization/id</i>
Pharmaceutical Adviser Organization Name	ON	<i>performer/assignedEntity/representedOrganization/name</i>
Pharmaceutical Adviser Organization Address	AD	<i>performer/assignedEntity/representedOrganization/addr</i>

555

6.3.4.3.3.8 Reference to Prescription Item

```
<entryRelationship typeCode='REFR'>
  <substanceAdministration classCode='SBADM' moodCode='INT'>
    <templateId root='2.16.840.1.113883.10.20.1.27' />
    <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.5.1' />
    <templateId root='1.3.6.1.4.1.19376.1.9.1.3.2' />
    :
  </substanceAdministration>
</entryRelationship>
```

560

The reference to the Prescription Item by which this Pharmaceutical Advice was performed SHALL be present, containing a Prescription Item Entry described in the Pharmacy Prescription (PRE) Content Profile.

570

This Prescription Item Entry SHALL be a complete copy (including the *<id>* element) of the Prescription Item by which this Pharmaceutical Advice was performed, with the following exception:

575

In case the Prescription Item by which this Pharmaceutical Advice was performed contains a “reason for the use of the medication”⁵, according to the specification of an “Internal Reference” entry (1.3.6.1.4.1.19376.1.5.3.1.4.4.1) a complete copy of this element would result in a broken link to the internal information referenced, because such information is not allowed in the Pharmaceutical Advice document. In this case the complete copy shall be modified and all reason(s) set to nullFlavor=MSK (“masked”: masked, confidential, not published).

⁵ see chapter “Reason” of the Pharmacy Prescription (PRE) profile

nullFlavor reason of a Prescription Item Entry:

```
580    <entryRelationship typeCode="RSON">
      <act classCode="ACT" moodCode="EVN">
        <templateId root="1.3.6.1.4.1.19376.1.5.3.1.4.4.1"/>
        <id nullFlavor="MSK"/>
        <code nullFlavor="MSK|NA"/>
      </act>
585    </entryRelationship>
```

6.3.4.3.3.9 Reference to Pharmaceutical Advice Concerns

```
<entryRelationship typeCode='REFR' inversionInd='false'>
  :
590  .
</entryRelationship>
```

Optional one or more Pharmaceutical Advice Concern entries (representing ICAs to other prescription or Dispense Items) SHOULD be present in case of validation issues with the objective Prescription Item. They SHALL conform to the Pharmaceutical Advice Concern Entry Content Module template (1.3.6.1.4.1.19376.1.9.1.3.5).

Each Pharmaceutical Advice Concern represents the general concern regarding one specific foreign prescription or Dispense Item, containing one or more problems caused by it.

6.3.4.3.3.10 Changed or Recommended Prescription Items (as Organizer)

```
600    <entryRelationship typeCode='REFR' inversionInd='false'>
      <organizer classCode='CLUSTER' moodCode='EVN'>
        <statusCode code='completed'>
          <component>
            <seperatableInd value='false'>
              <!-- First Prescription Item -->
              <substanceAdministration classCode='SBADM' moodCode='INT'>
                <templateId root='2.16.840.1.113883.10.20.1.27'/_>
                <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.5.1'/_>
                <templateId root='1.3.6.1.4.1.19376.1.9.1.3.2'/_>
```

```
:  
610    </substanceAdministration>  
       </component>  
       <component>  
           <!-- Second Prescription Item -->  
           :  
615    </component>  
       :  
  
       </organizer>  
   </entryRelationship>
```

620

This element SHALL be present, if the status of the Pharmaceutical Advice (<code> Element) is set to “**Dispense with change expected**”. In this case it shall indicate the changed Prescription Item(s), which are allowed to be dispensed instead of the original prescribed item.

625

More than one Prescription Items within the organizer indicate that the original Prescription Item has to be changed with the combination of Prescription Items as a whole.

This element MAY also be present, if the status of the Pharmaceutical Advice (<code> Element) is set to “**Dispense, no change expected**”. In this case it may recommend an alternative (drug, dosage, form, etc.) to the original Prescription Item.

630

More than one Prescription Items within the organizer indicate that the original Prescription Item can be changed with the combination of Prescription Items as a whole.

In all other cases it shall not be present.

Notes:

635

All Prescription Items shall be given as a whole according to the specification of the Prescription Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.2).

In both cases more than one <entryRelationship> elements indicate a choice of change or recommendation.

640 **6.3.4.4 Pharmaceutical Advice Concern Entry Content Module
(1.3.6.1.4.1.19376.1.9.1.3.5)**

<This section corresponds to Entry Content Module Specification D of the IHE Technical Framework. This section may or may not be present depending on the issues the profile addresses.>

645 **6.3.4.4.1 Standards**

This part describes the general structure for a Pharmaceutical Advice Item. It is based on the following standards:

HL7V3 NE2009	HL7 V3 2009 Normative Edition
CDAR2	HL7 CDA Release 2.0
CCD	ASTM/HL7 Continuity of Care Document
IHE PCC	Concern Entry (1.3.6.1.4.1.19376.1.5.3.1.4.5.1)

650 **6.3.4.4.2 Parent Template**

This entry content module inherits the structure of the Concern Entry Content Module, 1.3.6.1.4.1.19376.1.5.3.1.4.5.1.

6.3.4.4.3 Specification

This section makes use of the concern entry content modules.

655

This specification relies on the PCC Concern Entry Content Module (1.3.6.1.4.1.19376.1.5.3.1.4.5.1) specification and only describes additional constraints.

660 The chapters below identify and describe these fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA XML content.

```

665 <act classCode='ACT' moodCode='EVN'>
666   <templateId root='2.16.840.1.113883.10.20.1.27' />
667   <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.5.1' />
668   <templateId root='1.3.6.1.4.1.19376.1.9.1.3.5' />
669   <id root='' extension=''/>
670   <code nullFlavor='NA' />
671   <!-- Description of the ICA caused by the prescription or Dispense Item referenced below -->
672   <text><reference value="#description1"/></text>
673   <statusCode code='completed' />
674   <effectiveTime>
675     <low value=''/>
676     <high value=''/>
677   </effectiveTime>
678   <!--
679     zero to many entry relationships identifying each problem caused by the
680     prescription or Dispense Item referenced below
681   -->
682   <entryRelationship typeCode='SUBJ' inversionInd='false'>
683     :
684   </entryRelationship>
685   <!--
686     one referenced prescription or Dispense Item
687     which causes the problems stated above
688   -->
689   <entryRelationship typeCode='REFR'>
690     <substanceAdministration classCode='SBADM' moodCode='INT'>
691       :
692       </substanceAdministration>
693       <!-- or -->
694       <supply classCode='SBADM' moodCode='INT'>
695         :
696         </supply>
697   </entryRelationship>
698   <!-- Optional severity of the concern -->
699   <entryRelationship typeCode='SUBJ' inversionInd='true'>
700     <observation classCode='OBS' moodCode='EVN'>
701       <templateId root='2.16.840.1.113883.10.20.1.55' />
702       <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.1' />
703     :
704   </entryRelationship>
705 </act>

```

705 **6.3.4.4.3.1 Pharmaceutical Advice Concern Entry General Specification**

```

<act classCode='ACT' moodCode='EVN'>
  ...
</act>

```

See PCC TF2, Concern Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.5.1) specification.

710 **6.3.4.4.3.2 Prescription Item Entry TemplateID**

<templateId root='2.16.840.1.113883.10.20.1.27' />	<!-- CCD -->
<templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.5.1' />	<!-- PCC -->
<templateId root='1.3.6.1.4.1.19376.1.9.1.3.5' />	<!-- PHARM -->

See PCC TF2, Concern Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.5.1) specification.

715 **6.3.4.4.3.3 Pharmaceutical Advice Concern ID**

<id root=' ' extension=' '/>

This ID represents the Pharmaceutical Advice Concern ID and SHALL be present.

See PCC TF2, Concern Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.5.1) specification.

6.3.4.4.3.4 Pharmaceutical Advice Concern Code

720 <code nullFlavor='NA'/>

The code is not applicable to a concern act, and so shall be recorded as shown above.

See PCC TF2, Concern Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.5.1) specification.

6.3.4.4.3.5 Narrative description of the ICA

<text><reference value='#comment1' /></text>

725 An optional narrative description of the ICA caused by the prescription or Dispense Item MAY be referenced in the <text> element.

6.3.4.4.3.6 Pharmaceutical Advice Concern Status Code

<statusCode code='completed' />

730 The status of the <act> element SHALL be present and must be set to "completed". The concern has occurred and has been placed.

6.3.4.4.3.7 Effective Time

<effectiveTime>

 <low value=''/>

 <high value=''/>

735 </effectiveTime>

The <effectiveTime> element records the starting and ending times during which the concern was active.

See PCC TF2, Concern Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.5.1) specification.

740 **6.3.4.4.3.8 Problems caused by the referenced prescription or Dispense Item**

<entryRelationship typeCode='SUBJ' inversionInd='false'>

 :

</entryRelationship>

745 Zero to many entry relationships MAY be present identifying each problem or allergy caused by the prescription or Dispense Item referenced below. These entries SHALL conform to the specification of the IHE PCC [Problem Entry](#) or [Allergies and Intolerances](#).

See PCC TF2, Concern Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.5.1) specification.

6.3.4.4.3.9 Referenced prescription or Dispense Item

```
<entryRelationship typeCode='REFR'>
  <substanceAdministration classCode='SBADM' moodCode='INT'>
    :
  </substanceAdministration>
  <!-- or -->
  <supply classCode='SBADM' moodCode='INT'>
  :
</supply>
</entryRelationship>
```

760 Exactly one entry relationship SHALL be present identifying the referenced prescription or Dispense Item, which causes the concern. This entry SHALL conform to either the Prescription Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.2) or the Dispense Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.4) template.

These Prescription or Dispense Item Entries SHOULD be a complete copy (including the `<id>` element) of the one referenced to, with the following exception:

765 In case the referenced Prescription Item contains a “reason for the use of the medication”⁶ according to the specification of an “Internal Reference” entry (1.3.6.1.4.1.19376.1.5.3.1.4.4.1) a complete copy of this element would result in a broken link to the internal information referenced, because such information is not allowed in the Pharmaceutical Advice document. In this case the complete copy shall be modified and all reason(s) set to nullFlavor=MSK (“masked”: masked, confidential, not published).

770 nullFlavored reason of a Prescription Item Entry:

```
<entryRelationship typeCode="RSON">
  <act classCode="ACT" moodCode="EVN">
    <templateId root="1.3.6.1.4.1.19376.1.5.3.1.4.4.1"/>
    <id nullFlavor="MSK"/>
```

⁶ see chapter “Reason” of the Pharmacy Prescription (PRE) profile

```
<code nullFlavor="MSK|NA"/>  
</act>  
</entryRelationship>
```

780 **6.3.4.4.3.10 Severity of the concern**

```
<entryRelationship typeCode='SUBJ' inversionInd='true'>  
  
  <observation classCode='OBS' moodCode='EVN'>  
    <templateId root='2.16.840.1.113883.10.20.1.55'>  
    <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.1'>  
    :  
  </observation>  
</entryRelationship>
```

785 Exactly one optional Severity Observation MAY be present. This element SHALL conform to
790 the IHE PCC [Severity Entry Content Module \(1.3.6.1.4.1.19376.1.5.3.1.4.1\)](#) specification.

795 **6.5 PHARM Value Sets**

<i>Add section 6.5.A</i>

6.5.1 IHE Pharmaceutical Advice Status List

800 The Pharmaceutical Advice Status List is used in the Pharmaceutical Advice Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.3) for coding the overall outcome of the validation process.

codeSystem: **1.3.6.1.4.1.19376.1.9.2.1**

codeSystemName: **IHE Pharmaceutical Advice Status List**

Code	displayName
OK	Dispense, no change expected but allowed if recommended medication given
CHANGE	Dispense with change expected
REFUSE	Refusal to dispense until further discussion with prescriber
CANCEL	Definite cancellation of the Prescription Item

805

Appendix

Appendices A.1 to A.4 are applicable to this profile and are described in the “Pharmacy Prescription (PRE)” supplement.